

Project Name:	
Location:	
Item #:	Qty:
Model:	

THREE SOLID DOOR REACH-IN REFRIGERATOR

MODEL: BRF-3D-SS



BRF-3D-SS

ELECTRIC -

115V / 60Hz / 1Ph 7' (2.1m) NEMA 5-15P cord set included



3RD PARTY APPROVALS -





BERG WARRANTY -

Berg reach-in refrigerators and freezers are warrantied for 2 years on parts & labor, 5 year warranty on the compressor.

For warranty service on these products please call National Service America (NSA) at 1-877-672-7740.

Berg's 3 Solid Door Reach-In Refrigerator is constructed of heavy duty stainless steel both inside and out making it strong and durable enough to survive any kitchen environment. The cooling unit is bottom mounted and slide out for easy maintenance and cleaning. This model comes with 4" casters and plastic coated wire shelving that is easily removable to adjust the shelf height. The front digital controller and LED readout makes it easy to adjust the interior temperature. This model is ETL Listed and ETL Sanitation. It's backed with a 2 year warranty onparts and labor and a 5 year warranty on the compressor.

FEATURES AND CONSTRUCTION —

- Exterior is constructed of 430 stainless steel including doors
- Interior is constructed of 304 stainless steel
- The cabinet is insulated throughout with a foamed-inplace high density cell polyurethane insulation
- Recessed handles are built into the door for easy opening and closing
- Environmentally friendly R290 refrigerant
- LED temperature controller provides a digital display of cabinet temperatures and allows for easy temperature adjustments when necessary
- Bottom mounted cooling unit slides out for easy cleaning and maintenance and allows for storage area on top of the unit
- Includes 4" casters
- Bright LED lighting
- Self closing door
- Removable door gasket for easy cleaning
- Adjustable plastic coated steel shelves that have a load capacity of up to 90 lbs per shelf
- Locking door(s) keep items inside secure after hours


OPTIMAL STORAGE CAPACITY ————		
OF HIMAL STURAGE GAFAGIT	I	
BRF-3D-SS	72 Cu Ft (2039 L)	
DIT 3D 3372 Ou IT (2003 L)		
TEMPEDATURE		
TEMPERATURE ————		
BRF-3D-SS	33°F to //0°F (1°C to //°C)	

 These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity



THREE SOLID DOOR REACH-IN REFRIGERATOR

BRF-3D-SS

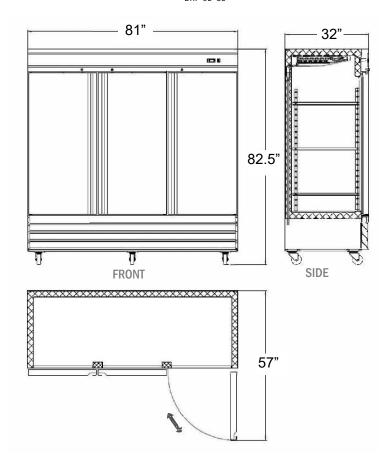

Model	BRF-3D-SS
Doors	3
Shelves	9
Net Volume (Cu. Ft.)	72 Cu. Ft.
Overall Dimensions (in)	81" × 32" × 82.5"
Interior Dimensions (in)	76"×27"×60"
Refrigerant	R290
Horsepower	3/4
Voltage/Hertz/Phase	115/60/1
Amps	9
Net Weight (Ibs)	650 lbs
Gross Weight (lbs)	694 lbs
Shipping Dimensions (in)	83" × 35" × 85"